

# EchoWave® LG10-11

Guided Wave Liquid Level Transmitter



## Application

Offered in three probe types, the general purpose guided wave transmitter provides continuous level measurement up to 18' (5.5m) with a 4-20 mA signal output, and is configured via our free WebCal® software. This liquid level sensor is applied in non-turbulent environments with foam, vapor, condensation, temperature or pressure. Select the rod or cable probe for use with clean, dirty, coating or crystallizing liquids in above grade metal or below grade tanks of any material. Select the coaxial probe for use with clean, non-coating or crystallizing liquids in above or below grade tanks of any material. Standard probe lengths may be user cut in the field. Typical applications include small day tank, skid or machine, IBC or drum, process tank, cooling tower and waste sumps.



## Features

- Offered in standard or custom probe lengths up to 18' (5.5m)
- Configuration is easy via WebCal software and USB adapter
- Rugged 316L stainless steel probe and process mount
- 4" (10cm) dead band enables utilization of the entire tank
- Disturbance scan maps and rejects false echo signal returns
- Rugged NEMA 4 aluminum enclosure with 316L process mount
- Self diagnostics with five selectable fail-safe signal outputs

## Success

Sintering is the process of compacting and forming a solid mass of material by extreme heat and pressure without melting it to the point of liquification. Its commonly used in the manufacturing of metals, ceramics and other materials process where process temperatures can exceed 400 degrees. Here, a LG10-0 is installed in a metal manufacturing plant waste sump using a PVC stand pipe to eliminate turbulence. The guided wave sensor is unaffected by the high temperature, condensation and foam.



# EchoWave® LG10-11


Guided Wave Liquid Level Transmitter



## Specifications

<b>Range:</b>	Rod & coaxial: 9.8' (3m) Cable: 18' (5.5m)
<b>Accuracy:</b>	± 3mm
<b>Dead band:</b>	Top: 4" (10cm) Bottom: 2" (5cm)
<b>Repeatability:</b>	< 2mm
<b>Resolution:</b>	< 2mm
<b>Configuration:</b>	WebCal® PC Windows® USB® 2.0
<b>Supply voltage:</b>	10-30 VDC
<b>Max. consumption:</b>	< 50mA @ 24 VDC
<b>Signal output:</b>	4-20mA, 3-wire
<b>Signal fail-safe:</b>	4mA, 20mA, 21mA, 22mA or hold last
<b>Dielectric:</b>	> 1.8
<b>Process temp.:</b>	F: -40° to 302° C: -40° to 150°
<b>Ambient temp.:</b>	F: -40° to 185° C: -40° to 85°
<b>Pressure:</b>	-14.5 to 250 PSI (-1 to 17 bar)
<b>Enclosure rating:</b>	NEMA 4
<b>Encl. material:</b>	Aluminum
<b>Feed through mat.:</b>	316L SS & PEEK
<b>Conduit entrance:</b>	(1) 1/2" NPT connector
<b>Probe material:</b>	Rod & coaxial: 316L SS Cable: 316 SS
<b>Process mount:</b>	3/4" NPT (3/4" G)
<b>Classification:</b>	General purpose
<b>Certification:</b>	cCSAus, NRTL
<b>Compliance:</b>	CE, CRN, RoHS

## Dimensions

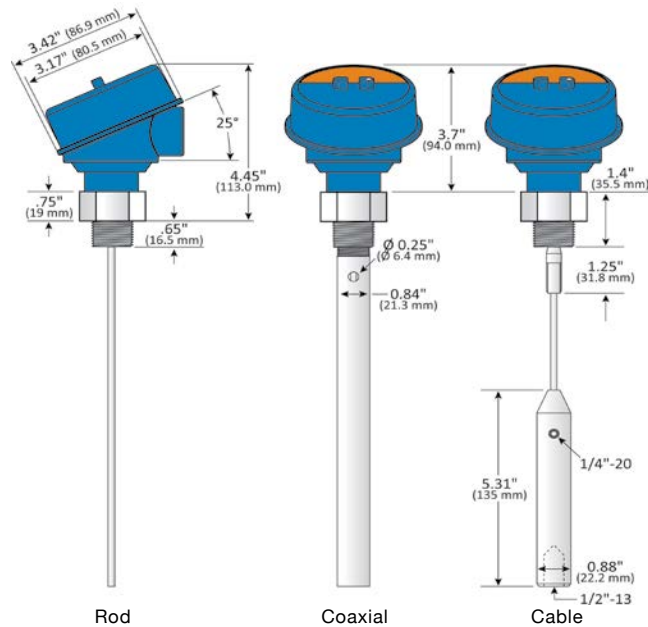

## Configuration



L199-1001

The level sensor is configurable via our free WebCal PC software and Fob USB adapter. The sensors are offered with and without Fobs. Fobs are universal and can be used to configure any WebCal compatible product. WebCal is a free download from our website.

## Ordering

LG1  -  0  3 - 0  -

**RANGE (1)**

0 9.8' (3m)  
1 18' (5.5m)

**PROBE TYPE (2) (3)**

0 Rod  
1 Coaxial  
2 Cable

**PROCESS MOUNT**

0 NPT (US)  
1 G (Metric)

**FOB USB ADAPTER**

0 No Fob  
1 With Fob

**PROBE LENGTH (4)**

XXX Standard or custom probe length

## NOTES

- The max. range for the rod (LG10) and coaxial (LG10) probe is 3m; and the cable probe (LG11) is 5.5m.
- Rod and cable probes may be installed in above grade metal and reinforced concrete tanks or below grade tanks of any material. Coaxial probes may be installed in tanks of any material, above or below grade.
- Probes are available in the following configurations:  
Rod: LG10- 0 3 - 0 - XXX  
Coaxial: LG10- \_ \_ 3 - 0 - XXX  
Cable: LG11- 0 3 - 0 - XXX
- Probes are offered in standard or custom lengths. Standard lengths for the rod and coaxial probes are 036", 072" and 118"; and the cable probe is 216". Custom lengths may be specified in 1/2" (1.3cm) increments down to 24" (.6m) on the rod and coaxial probes; and to 48" (1.2m) on the cable probe. A cut charge of \$100 net will be added to the next highest standard probe length on custom probe length orders. Standard probe lengths may also be user cut in the field which is addressed in the manual.



Hitma Instrumentatie  
www.hitma-instrumentatie.nl  
info@hitma-instrumentatie.nl  
+31 (0)297 - 514 833

België / Belgique  
www.hitma-instrumentatie.be  
info@hitma-instrumentatie.be  
+32 (0)2 - 387 28 64

CA 90720 USA p 562.598.3015 f 562.431.8507 w flowline.com

DS300840 REV A3