

DATA SHEET

LV 111-117-110

Vane probe thermo-anemometer



Airflow calculation



Hold-min-max functions



Selection of units



Automatic average

Features

- Airflow calculation
- Airflow calculation with cone (LV 110/117)
- Automatic average
- Selection of units (air velocity, airflow and temperature)
- Affichage du minimum et du maximum
- Configurable auto shut-off
- Detection of flow direction (LV 110/117)
- Selection of the type of cone

Technical specifications

Parameters	Accuracy**	Measuring range	Resolution
Air velocity	LV111 (Ø 14 mm): from 0.8 to 3 m/s: $\pm 3\%$ of reading ± 0.1 m/s From 3.1 to 25 m/s: $\pm 1\%$ of reading ± 0.3 m/s	From 0.8 to 25 m/s	0.1 m/s
	LV110 (Ø 100 mm): from 0.3 to 3 m/s: $\pm 3\%$ of reading ± 0.1 m/s From 3.1 to 35 m/s: $\pm 1\%$ of reading ± 0.3 m/s	From 0.3 to 35 m/s	0.01 m/s, 0.1 m/s
	LV 117 (Ø 70 mm): from 0.4 to 3 m/s: $\pm 3\%$ of reading ± 0.1 m/s From 3.1 to 35 m/s: $\pm 1\%$ of reading ± 0.3 m/s	From 0.4 to 35 m/s	0.1 m/s
Airflow All models	$\pm 3\%$ of reading $\pm 0.03 \times \text{area (cm}^2\text{)}$	From 0 to 99 999 m ³ /h	1 m ³ /h
Temperature All models	$\pm 0.4\%$ of reading $\pm 0.3\text{ }^{\circ}\text{C}$	From -20 to +80 $^{\circ}\text{C}$	0.1 $^{\circ}\text{C}$

*Except class 110 S which is supplied with adjustment certificate.

**All the accuracies indicated in this technical datasheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

General features

Measuring units	LV 111 - LV 117 - LV 110: m/s, fpm, km/h All models (airflow): m³/h, cfm, l/s, m³/s All models (temperature): °C, °F
Measuring elements	Air velocity: Hall effect sensor Ambient temperature: NTC sensor
Display	4 lines, LCD technology. Dimensions 50 x 36 mm. 2 lines of 5 digits with 7 segments (value) 2 lines of 5 digits with 16 segments (unit)
Vane diameter	LV111: Ø 14 mm : LV117: Ø 70 mm LV110: Ø 100 mm
Cable	Coiled, 0.45 m length, extension 2.4 m
Housing	ABS, protection IP54
Keypad	5 keys
European directives	2014/30/EU EMC; 2014/35/EU Low Voltage; 2011/65/EU RoHS II; 2012/19/EU WEEE
Power supply	4 batteries AAA LR03 1.5 V
Battery life	58 hours ⁽¹⁾
Ambience	Neutral gas
Conditions of use (°C, %RH, m)	From 0 to +50 °C. In non condensing conditions. From 0 to 2000 m.
Operating temperature (probe)	From 0 to +50 °C
Storage temperature	From -20 to +80 °C
Auto shut-off	Adjustable from 0 to 120 min
Weight	390 g

⁽¹⁾Battery life given at 20 °C with alkaline batteries.

Operating principle

Air velocity: Hall effect sensor

Rotation of the vane probe leads to a circular magnet of 8 poles. A dual Hall effect sensor, placed next to the magnet captures the signals of magnetic field polarity transition. The sensor signal is converted to electrical frequency and is proportional to the rotation velocity of the vane probe. Signal chronology allows to determine the rotation direction.

Thermometer: NTC probe

Negative temperature coefficient probes are thermistors with a resistance that decreases with temperature according to the equation below:


$$R_{(T)} = R_{(T_0)} e^{\left(\frac{\alpha}{100} \times (T_0 + 273.15)^2 \times \left(\frac{1}{T + 273.5} - \frac{1}{T_0 + 273.5} \right) \right)}$$

R_T = resistance sensor value at temperature T

$R(T_0)$ = resistance sensor value at reference temperature T_0

T and T_0 in °C


α and T_0 sensor specific constants

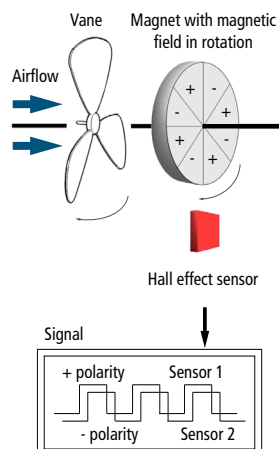

Maintenance

We carry out calibration, adjustment and maintenance of your instruments to guarantee a constant level of quality of your measurements. As part of Quality Assurance Standards, we recommend you to carry out a yearly checking.

Dimensions (in mm)

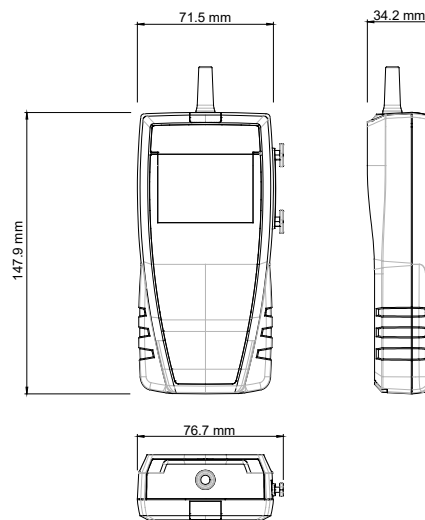

Kit content

Designation	Sales reference	Description
LV 110	24625	Ø 100 mm vane probe thermo-anemometer with calibration certificate and soft transport case
LV 110 S	24726	Ø 100 mm vane probe thermo-anemometer with adjustment certificate and soft transport case
LV 111	24623	Ø 14 mm vane probe thermo-anemometer with calibration certificate and soft transport case
LV 111 S	24724	Ø 14 mm vane probe thermo-anemometer with adjustment certificate and soft transport case
LV 117	24624	Ø 70 mm vane probe thermo-anemometer with calibration certificate and soft transport case
LV 117 S	24725	Ø 70 mm vane probe thermo-anemometer with adjustment certificate and soft transport case

Certificates

Calibration certificate: A calibration is a comparison of the values of the instrument with those of a standard to determine a measurement error with an associated calibration uncertainty. A calibration certificate guarantees the traceability of measurements to national standards.

Adjustment certificate: An adjustment certificate is a document that ensures the conformity of the device with the tolerances of the data sheet. It ensures that the device has followed the manufacturing process.

Accessories

Designation	Sales reference	Description
CQ 15	24633	Magnetic protective housing
RTE	24632	Telescopic extension, 1 m length, with index at ±90°
Si-K25	28111	Round airflow cone (Ø 260 mm, airflow: 10 to 400 m³/h)
Si-K85	28112	Square airflow cone (350 x 350 mm, airflow: 10 to 400 m³/h)
MT 51	24636	ABS transport case
ST 110	24635	Soft transport case



Hitma Instrumentatie
www.hitma-instrumentatie.nl
info@hitma-instrumentatie.nl
+31 (0)297 - 514 833

België / Belgique
www.hitma-instrumentatie.be
info@hitma-instrumentatie.be
+32 (0)2 - 387 28 64

